

FIG. 1


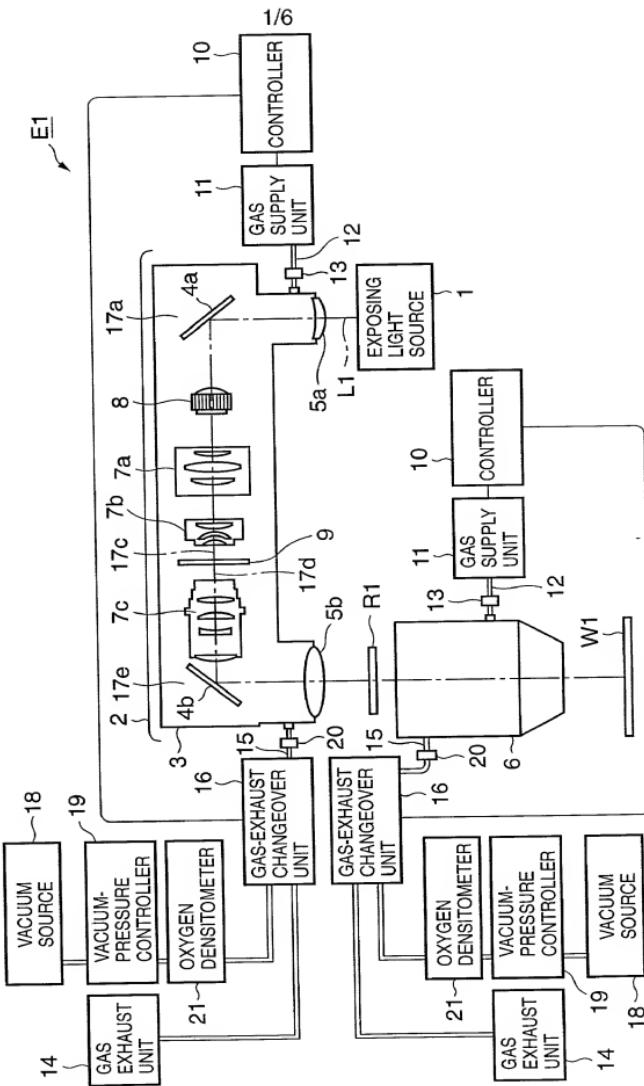


FIG. 2

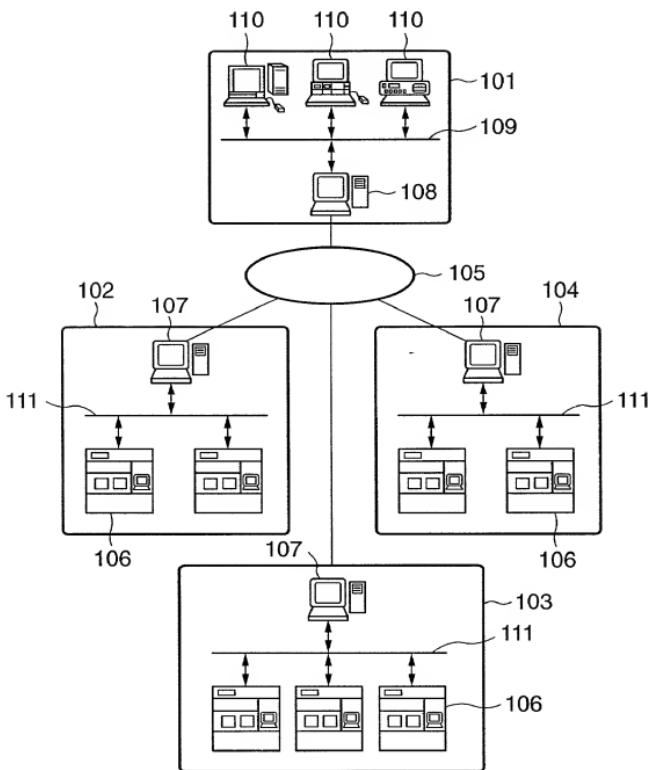

105101068657666

FIG. 3

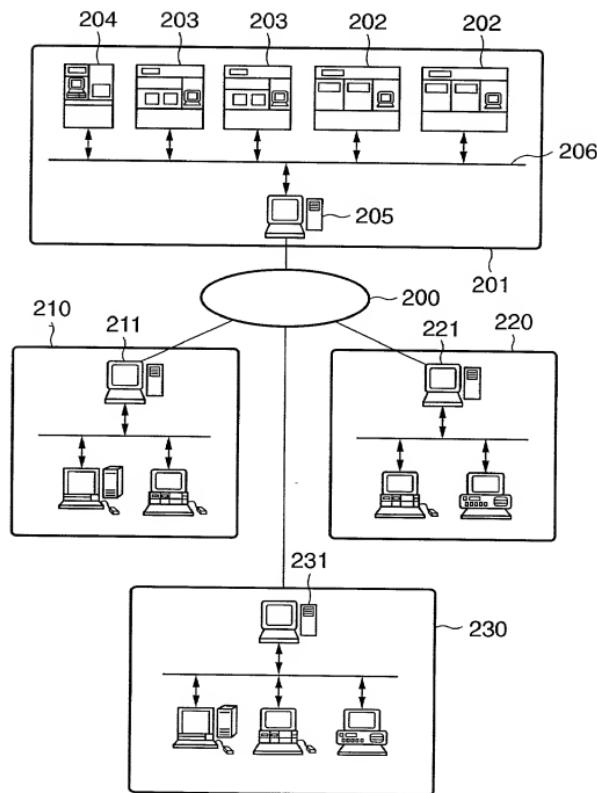


FIG. 4

URL <http://www.maintain.co.jp/db/input.html>

MALFUNCTION DATABASE INPUT SCREEN

DATE OF OCCURRENCE 2000/3/15 ~ 404

MODEL * * * * * * * * ~ 401

SUBJECT MATTER OPERATING MALFUNCTION (ERROR AT BOOTING) ~ 403

EQUIPMENT SERIAL NO. 465NS4580001 ~ 402

DEGREE OF URGENCY D ~ 405

CONDITION LED CONTINUES FLASHING AFTER
POWER IS TURNED ON ~ 406

COUNTERMEASURE POWER TURNED ON AGAIN
(RED BUTTON PUSHED AT START UP) ~ 407

METHOD TEMPORARY MEASURES COMPLETED ~ 408


REPORT

SEND 410 411 412

RESET

LINK TO DATABASE OF RESULTS SOFTWARE LIBRARY OPERATING GUIDE

FIG. 5

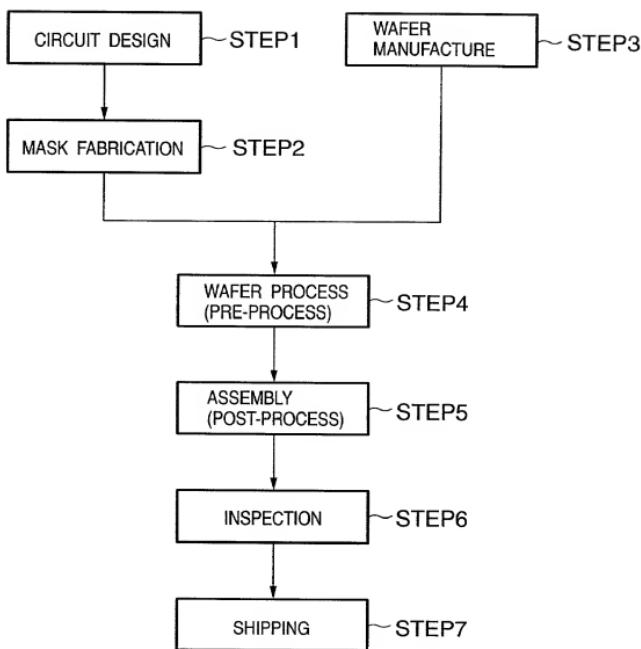

FLOW OF SEMICONDUCTOR DEVICE MANUFACTURE

FIG. 6

00975989 - 101503

